# High Performance Color by Design

# **Designtex**


Value products ideal for high traffic/high abuse environments

Quick Ship Program

Nanotechnology Stain Resistant Finish Compatible with Disinfectants 95,000+ Abrasion





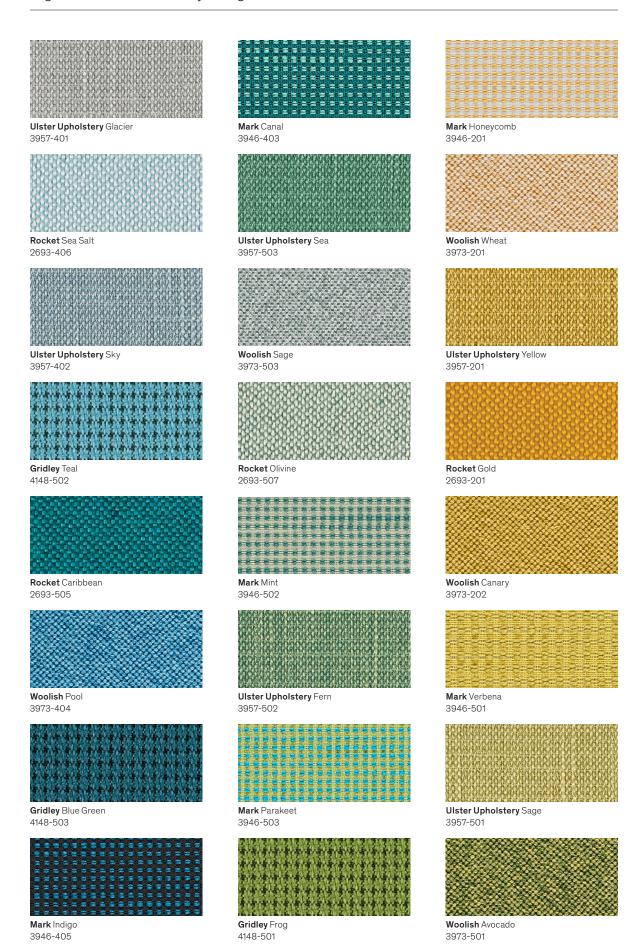



## High Performance Color by Design

Style Name	Style#	Content	Finish	Cleaning	Width	Repeat	Abrasion	Multi-Use	Recycled Content
Gridley	4148	85% Polyester (Postconsumer Recycled), 15% Polyester	Nanotechnology Stain Resistant	WS	54 inches (137 cm)	None	100,000 Wyzenbeek double rubs (CD)	•	•
Mark	3946	78% Polyester, 22% Nylon (Solution Dyed)	Nanotechnology Stain Resistant	WS Bleach (10:1)	57 inches (145 cm)	None	100,000 Wyzenbeek double rubs (CD)		
Rocket	2693	72% Polyester (Postconsumer Recycled), 28% Polyester	Nanotechnology Stain Resistant	WS	54 inches (137 cm)	None	100,000 Wyzenbeek double rubs (CD)	•	•
Ulster Upholstery	3957	100% Polyester	Nanotechnology Stain Resistant	WS	55 inches (140 cm)	None	95,000 Wyzenbeek double rubs (CD)		
Woolish	3973	85% Polyester (Postconsumer Recycled), 15% Polyester	Nanotechnology Stain Resistant	WS	54 inches (137 cm)	None	400,000 Wyzenbeek double rubs (CD)	•	•

Meets or exceeds these ACT performance standards:



Additional colorways available For samples please call 800.221.1540

#### Nanotechnology Stain Resistant Finish

A stain resistant finish that, thanks to the light-weight nature of nanotechnology, preserves a fabric's feel. The finish also allows any bleach-treatable fabric to remain bleach cleanable. Ask your representative about our nanotechnology stain resistant finish providers.

#### **Cleaning Codes**

**Bleach** Treatable with a 4:1 or 10:1 water-to-bleach dilution for the lifetime of the product. **WS** Clean only with water-based or solvent-based cleaner. Do not saturate. For regular maintenance of coated fabrics, always rinse the cleaned and/or disinfected area(s) with fresh water. Wipe dry and repeat if necessary.

#### **Bleach and Disinfectant Testing**

All products have been tested with bleach (sodium hypochlorite) and/or a variety of disinfectants (alcohol, hydrogen peroxide, quaternary ammonium). Scan the QR code below for specific test results.

#### Abrasion

Abrasion has been tested with the Wyzenbeek method using either cotton duck (CD) or wire screen (WS) as the abradant, or the Martindale method using worsted wool as the abradant. ACT guidelines require at least 30,000 Wyzenbeek double rubs or 40,000 Martindale cycles for woven upholsteries, or 50,000 Wyzenbeek double rubs for coated upholsteries in heavy duty single-shift application. Multiple factors affect fabric durability and appearance retention, including end-user application and proper maintenance. Abrasion test results exceeding ACT Performance Guidelines are not an indicator of product lifespan.

### Quick Ship Program

Colors on this card are part of the Quick Ship Program. Orders up to 50 yards ship the next business day.

